


100120/1056

Diesel driven pump 4", high pressure

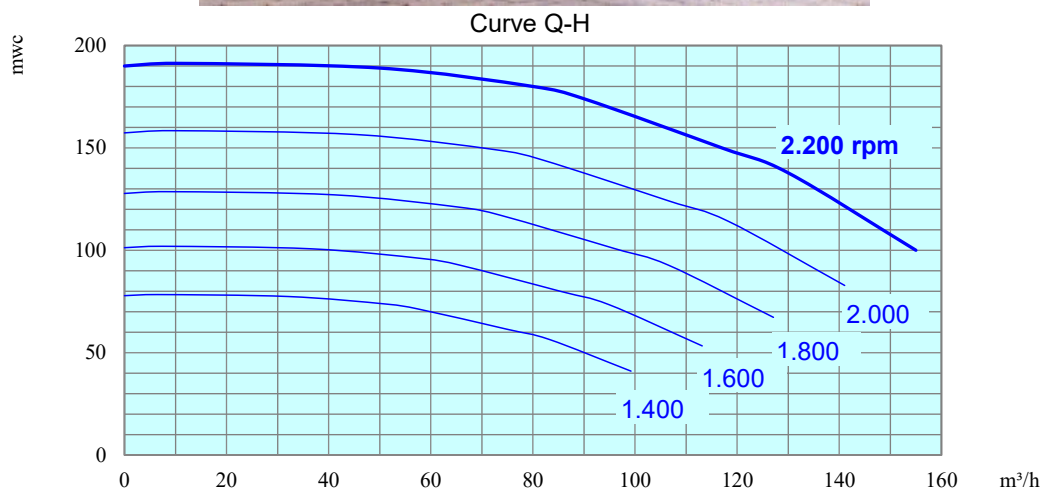

Type	: 100120/1056
Applications	: fluidization, fire fighting-like applications, clean or slightly polluted water
Engine	: Same 6 cylinder diesel engine, aircooled, type 1056
Power output	: 78 kW at 2.200 rpm
Free impeller passage	: 8 mm
Starting system	: 24 V electrical start
Weight	: 2.580 kg (full tank)
Tankage	: 360 liters
Consumption	: 22 liters / hour at maximum capacity
Autonomy	: ca. 16 h
Dimensions	: 2.710 x 1.020 x 1.850 mm
Coupling	: suction : Perrot quick couplings 4" male discharge : DIN-flange DN100 PN16
Characteristics	: not self priming (hand priming unit mounted) engine is canopied and sound attenuated
Equipment	: adjustable speed, Chalwyn valve, spark-arrestor central lifting eye, forklift pockets threeway valve for the connection of an external fuel tank