


## 100B43.7H (37-BEH4) Submersible sewage pump 4"



Curve Q-H

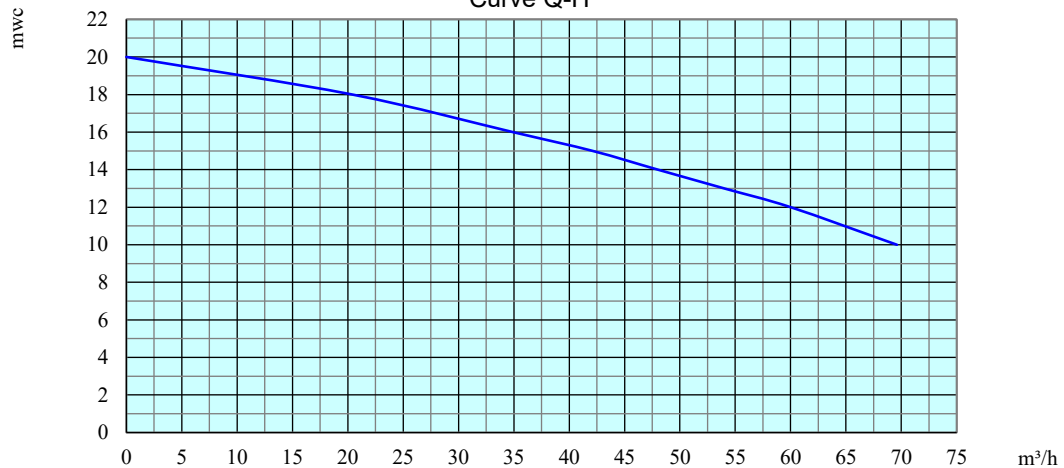

Type	: Tsurumi, 100B43.7H
Applications	: strongly contaminated fluids, waste water, sewage, mud water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 4,7 kW at 1.450 rpm
Nominal current	: 7,9 A
Free impeller passage	: 35 mm
Weight	: 81 kg ( without cable )
Height	: 656 mm
Diameter	: Ø 569 mm
Coupling	: discharge side : Perrot quick coupling 4" male
Characteristics	: large free impeller passage open two-channel impeller
Equipment	: 10 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p