


# 100B45.5 (100-5,5-4B4)

## Submersible sewage pump 4"



Curve Q-H

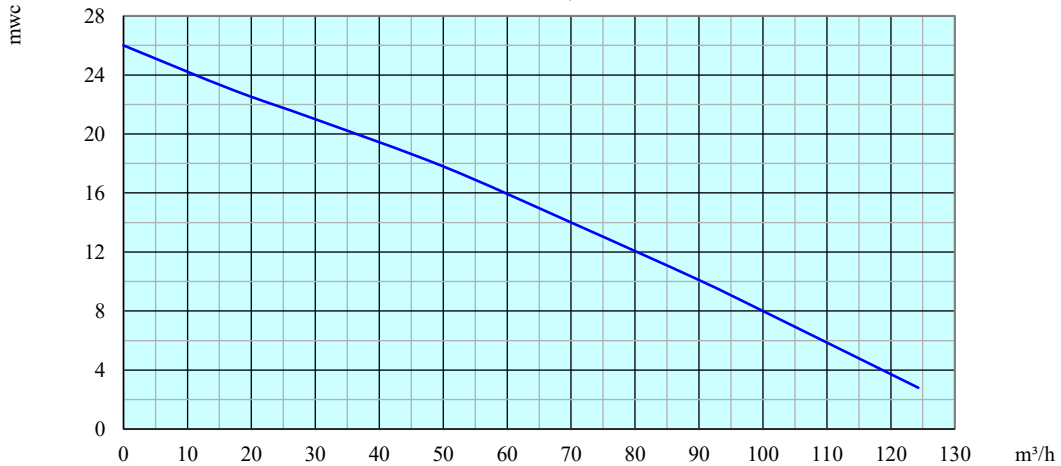

Type	: Tsurumi, 100B45.5
Applications	: strongly contaminated fluids, waste water, sewage, mud water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 6,96 kW at 1.443 rpm
Nominal current	: 1,9 A
Free impeller passage	: 40 mm
Weight	: 147 kg ( without cable )
Height	: 908 mm
Diameter	: Ø 687 mm
Coupling	: discharge side : Perrot quick coupling 4" male
Characteristics	: large free impeller passage open two-channel impeller
Equipment	: 10 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p