


150 VL

Diesel driven pump 6" on skid, sound attenuated

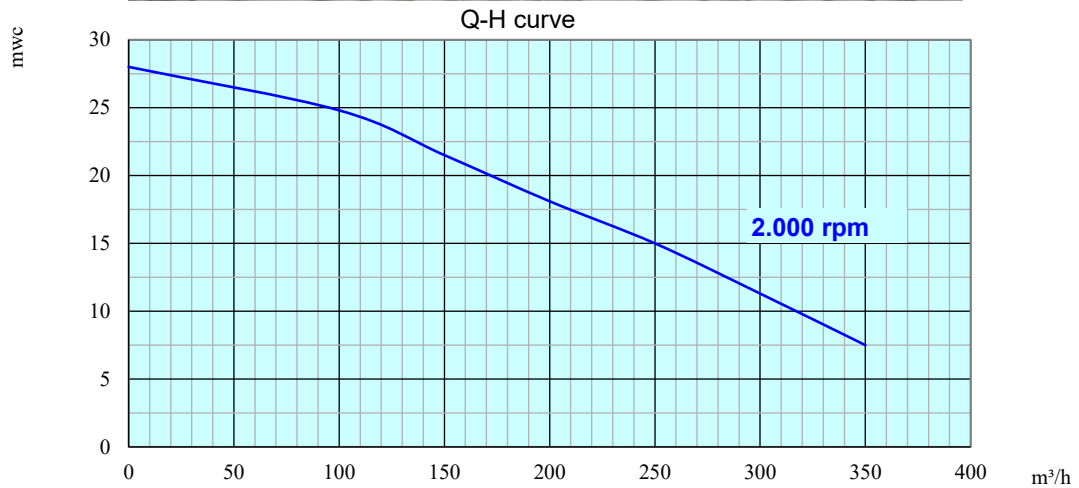

Type	: Pioneer 150VL
Applications	: sewagewater, sludge, slurry, ...
Engine	: Perkins 4-cilinder diesel engine 404D-22t, sound attenuated
Power output	: 29,3 kW at 2.000 rpm
Free impeller passage	: 130 mm \varnothing
Starting system	: 12 V electric start
Weight	: 1.730 kg (full tank)
Tankage	: 260 liters
Consumption	: 9 liters/ hour at maximum capacity
Autonomy	: 28 h at maximum capacity
Dimensions	: 2.300 x 1.100 x 1.610 mm
Couplings	: suction & discharge : Perrot quick coupling 6" male
Characteristics	: on skid, fully bunded canopy, sound attenuated 64 dB at 7 m automatic dry self priming, indefinite dry-running possible
Equipment	: adjustable speed, float switches for automatic working, battery switch, spark-arrestor central lifting eye, forklift pockets, threeway valve for the connection of an external fuel tank Viton seals, socket for LEL detection