


200-15-4B3 Submersible sewage pump 6"/10"



Curve Q-H

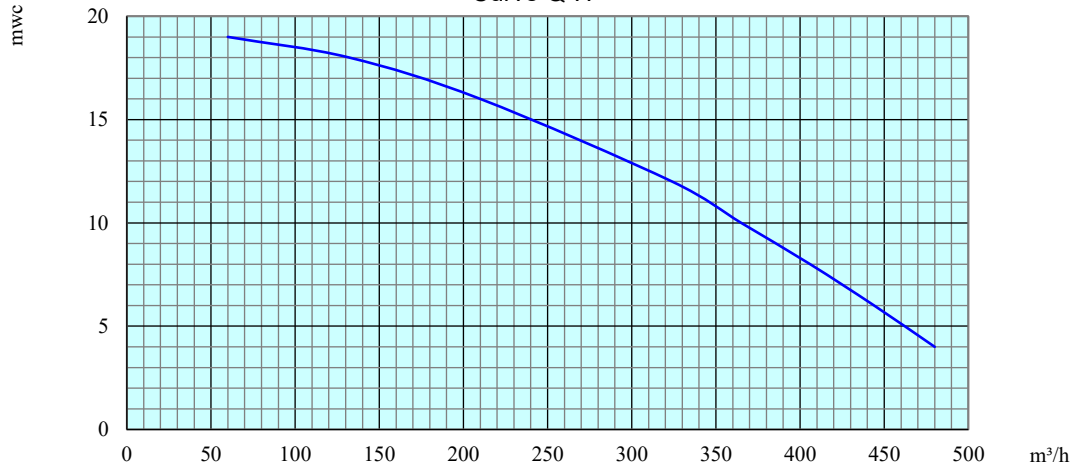

Type	: Tsurumi, 200-15-4B3
Applications	: strongly contaminated fluids, waste water, sewage, mud water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 17,6 kW at 1.450 rpm
Nominal current	: 31 A
Free impeller passage	: 77 x 60 mm
Weight	: 360 kg (without cable)
Height	: 1.148 mm
Diameter	: Ø 968 mm
Coupling	: discharge side : Perrot quick coupling 6" male
Characteristics	: large free impeller passage closed two-channel impeller
Equipment	: 20 m power cable Off-auto-on control panel, suitable for outdoor use, with float switches l=20 m plug 63A 5p