


220-TR Submersible aerator

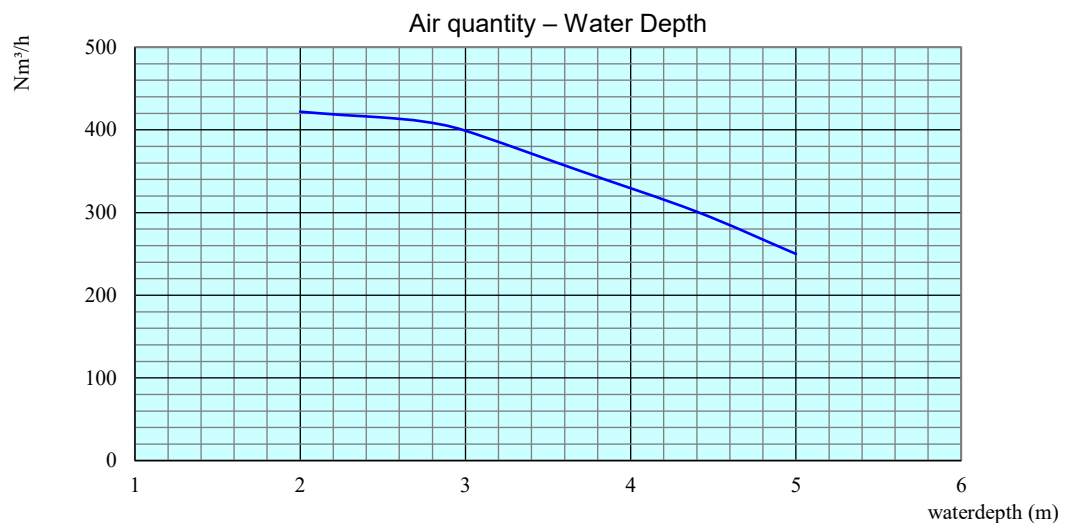

Type	: Tsurumi, 220-TR
Applications	: aeration of activated sludge
Motor	: 3 x 400 V, 50 Hz
Power output	: 26,4 kW at 1.450 rpm
Nominal current	: 48 A
Weight	: 600 kg (without cable)
Height	: 1.278 mm
Diameter	: Ø 975 mm
Coupling	: air inlet with female threaded flange 4"
Characteristics	: good mixing, even at depth no haze, nor sedimentation simple installation and maintenance
Equipment	: mounted on foot stand, lifting chain 20 m power cable start - stop cabinet with thermo-magnetic motor protection, plug 63A 5P silencer with control valve