


50KTX21.5 (KT15-BX2)

Explosion proof submersible pump 3"

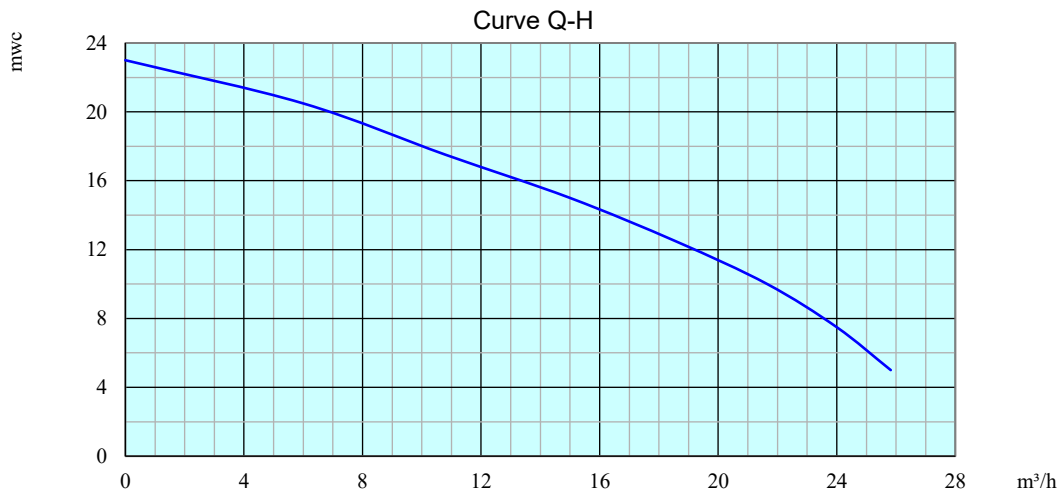

- Type : Tsurumi, 50KTX21.5, Eex d IIB T4
- Applications : industry, explosive atmosphere, ... (water with sand)
- Motor : 3 x 400 V, 50 Hz
- Power output : 2,16 kW at 2.850 rpm
- Nominal current : 3,5 A
- Free impeller passage : 8,5 mm
- Weight : 55 kg (without cable)
- Height : 652 mm
- Diameter : Ø 300 mm
- Coupling : discharge side : Perrot quick coupling 3" male
- Characteristics : Cenelec certified
durable, hardwearing submersible contractor pump, impeller in iron casting
- Equipment : power cable : 10 or 20 meter
control panel Ex II 2 G Eex dII BT6,
equipped with 2 explosion proof floats, l = 20 meter, Ex II 1G EEx ia II C T6
A.T.X. plug 16A 5p Ex II 2G Eex de II C T6