


50SQ2.75 (SQ2-8TY) Stainless steel submersible pump 2"

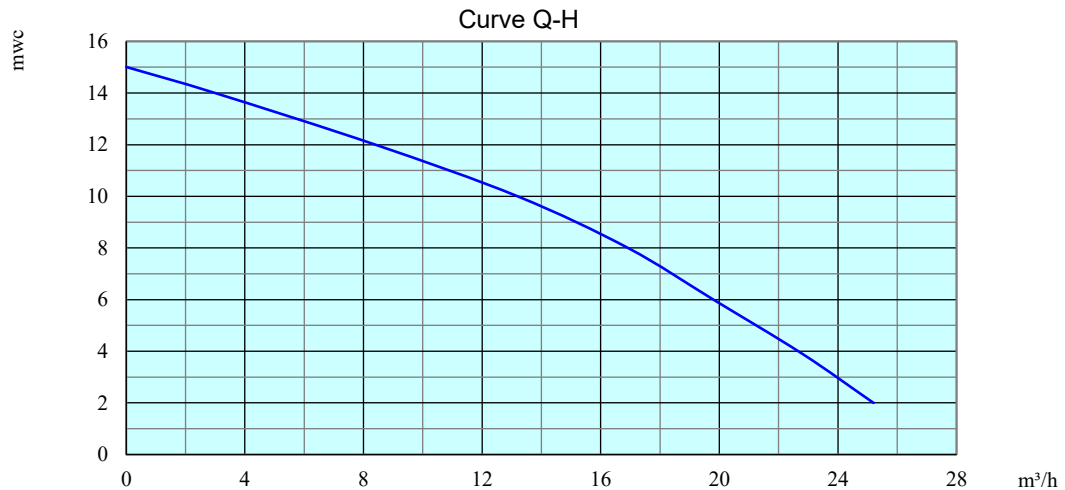

Type	: Tsurumi, 50SQ2.75 (SQ2-8TY)
Applications	: industry, chemically polluted water, waste water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 1,2 kW at 2.806 rpm
Nominal current	: 1,8 A
Free impeller passage	: 6 mm
Weight	: 14 kg (without cable)
Height	: 384 mm
Diameter	: Ø 180 mm
Couplings	: discharge side : stainless steel Perrot quick coupling 2" male
Particularities	: industrial submersible pump suction cover, pump and engine casing and impeller in stainless steel 304
Equipment	: 10 m power cable CEE start-stop motor protection plug 16A 5p