


50U2.4_(U2-4T)

Submersible sewage pump 2"

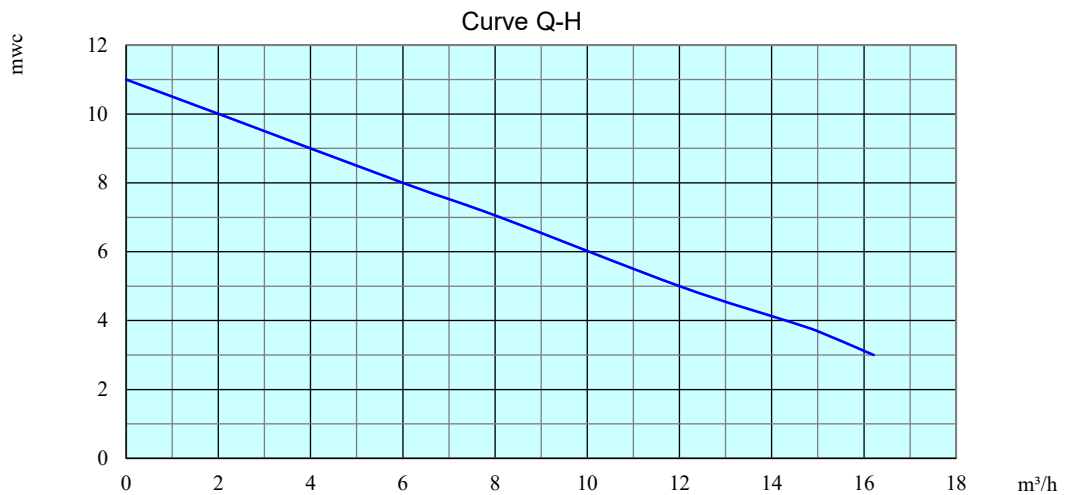

Type	: Tsurumi, 50U2.4
Applications	: waste water, effluent water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 0,59 kW at 2.850 rpm
Nominal current	: 1,1 A
Free impeller passage	: 35 mm
Weight	: 19,2 kg (without cable)
Height	: 400 mm
Diameter	: Ø 236 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: large free impeller passage vortex impeller
Equipment	: 10 m power cable start-stop switch with thermo-magnetic motor protection plug 16A5P