


## 50U2.75 (U2-8T) Submersible sewage pump 2"

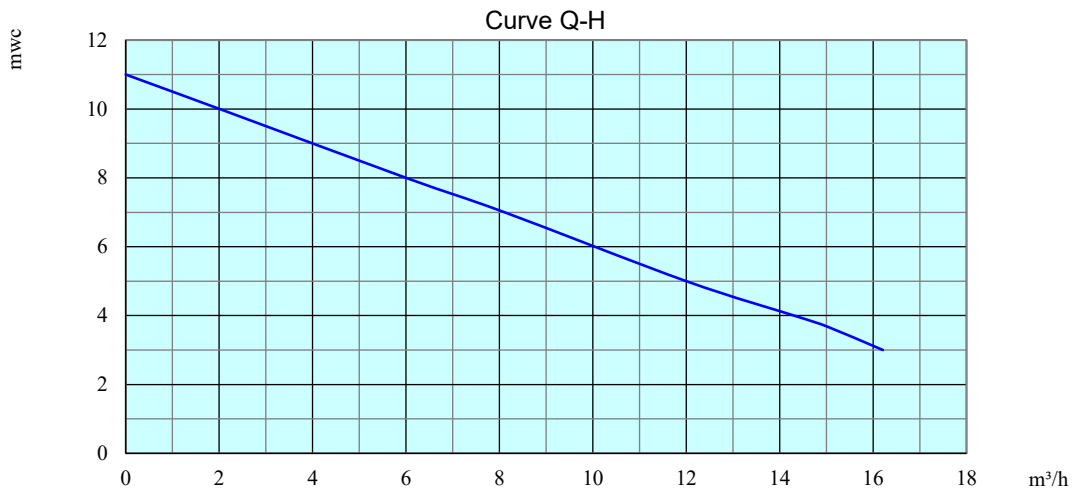

|                       |   |
|-----------------------|---|
| Type                  | : Tsurumi, 50U2.75  |
| Applications          | : waste water, sewage, effluent water, ...  |
| Motor                 | : 3 x 400 V, 50 Hz  |
| Power output          | : 1,1 kW at 2.850 rpm   |
| Nominal current       | : 2,1 A   |
| Free impeller passage | : 35 mm   |
| Weight                | : 22,7 kg ( without cable )   |
| Height                | : 393 mm  |
| Diameter              | : Ø 249 mm  |
| Coupling              | : discharge side : Perrot quick coupling 2" male  |
| Characteristics       | : large free impeller passage<br>vortex impeller  |
| Equipment             | : 10 m power cable<br>Start-stop switch with thermo-magnetic motor protection<br>plug 16A5P |