


# 8090-5/4L42C

## Diesel driven pump 4", high pressure



Curve Q-H

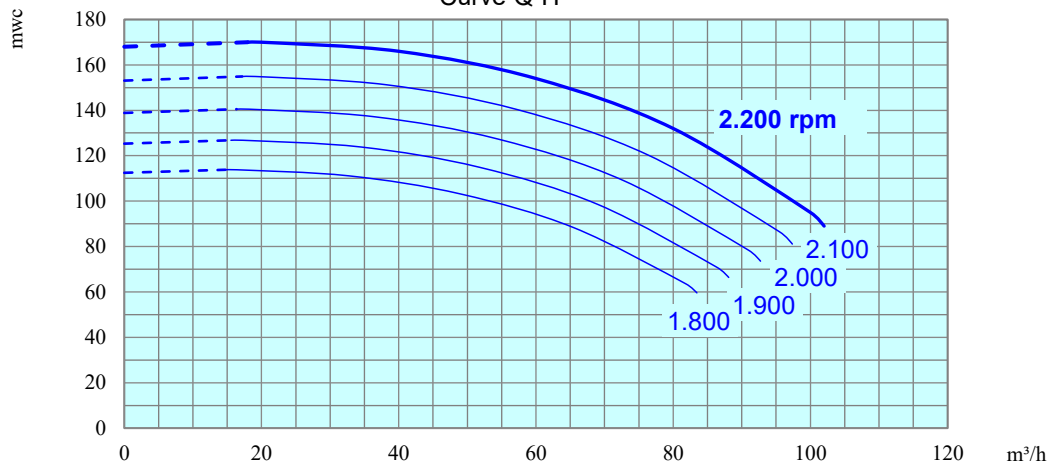

Type	: 8090-5/4L42C
Applications	: fluidization, fire fighting-like applications, clean or slightly polluted water
Engine	: Hatz 4 cilinder diesel engine, aircooled, sound attenuated, type 4L42C
Power output	: 43,4 kW at 2.200 rpm
Free impeller passage	: 6 mm ( prefilter )
Starting system	: 12 V electrical start
Weight	: 1.720 kg ( full tank )
Tankage	: 230 liters
Consumption	: 13 liters / hour at maximum capacity
Dimensions	: 2.660 x 1.180 x 1.550 mm
Coupling	: suction : Perrot quick couplings 4" male discharge : DIN-flange DN80 PN16
Characteristics	: not self priming (hand priming unit mounted) prefilter non return valve, pressure gauge and gate valve
Equipment	: adjustable speed, vacuummeter, master switch central lifting eye, forklift pockets