


80BZ41.5 (80-1,5-UB5) Submersible sewage pump 3"



Curve Q-H

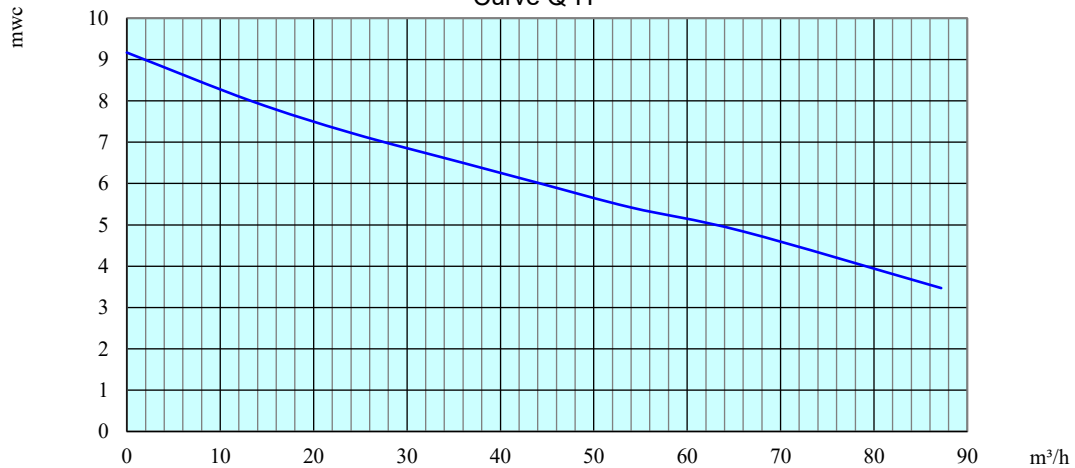

Type	: Tsurumi, 80BZ41.5
Applications	: strongly contaminated fluids, waste water, sewage, mud water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 2,2 kW at 1.450 rpm
Nominal current	: 4 A
Free impeller passage	: 80 mm
Weight	: 78 kg (without cable)
Height	: 631 mm
Diameter	: Ø 523 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: large free impeller passage closed single-channel impeller
Equipment	: 10 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p