


80SFQ211

Stainless steel submersible pump 3"

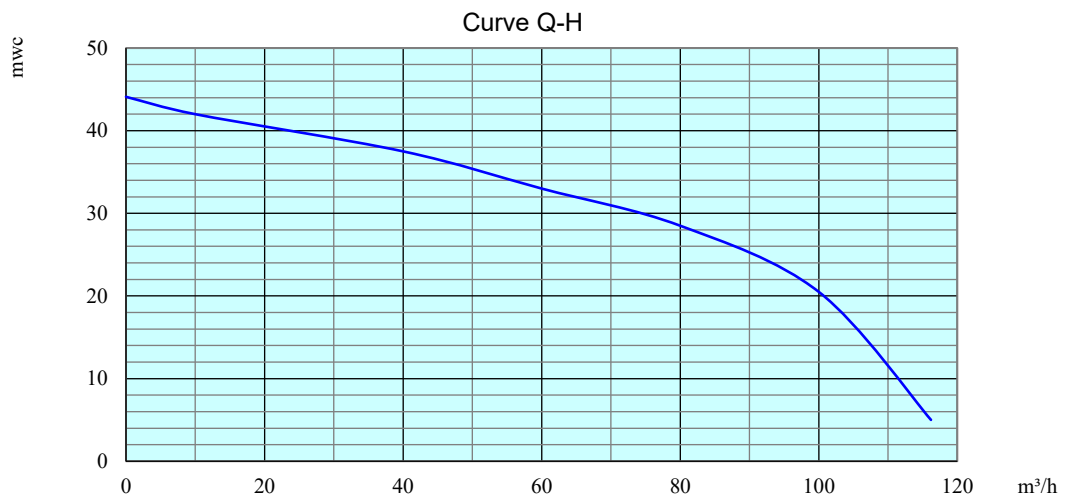

Type	: Tsurumi, 80SFQ211
Applications	: industry, chemically polluted water, waste water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 12,6 kW at 2.935 rpm
Nominal current	: 21 A
Free impeller passage	: 30 mm
Weight	: 143 kg (without cable)
Height	: 892 mm
Diameter	: Ø 635 mm
Couplings	: discharge : stainless steel Perrot quick coupling 3" male
Particularities	: large free impeller passage suction cover, pump and engine casing and impeller in stainless steel 316
Equipment	: 10 m power cable off-auto-on control panel, suitable for outdoor use, with float switches l=10 m plug 32A 5p