


## 80SFQ23.7 (37-CL2) Stainless steel submersible pump 3"

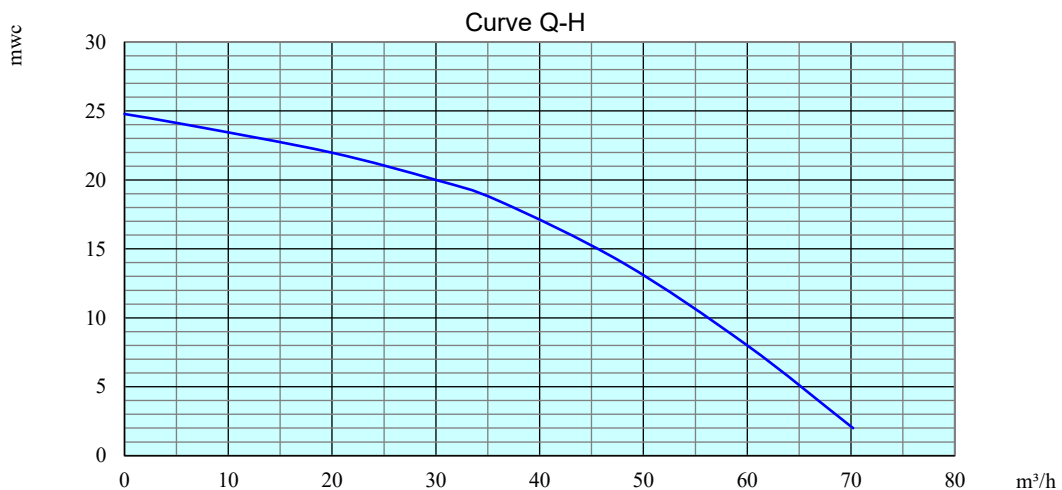

Type	: Tsurumi, 80SFQ23.7 (37-CL2)
Applications	: industry, chemically polluted water, waste water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 4,6 kW at 2.850 rpm
Nominal current	: 7,3 A
Free impeller passage	: 15 mm
Weight	: 52 kg ( without cable )
Height	: 552 mm
Diameter	: Ø 359 mm
Couplings	: discharge side : stainless steel Perrot quick coupling 3" male
Particularities	: industrial submersible pump suction cover, pump and engine casing and impeller in stainless steel 316
Equipment	: 10 m power cable CEE start-stop motor protection plug 16A 5p