


BA150 K254 Electrically driven pump 6"



Curve Q-H

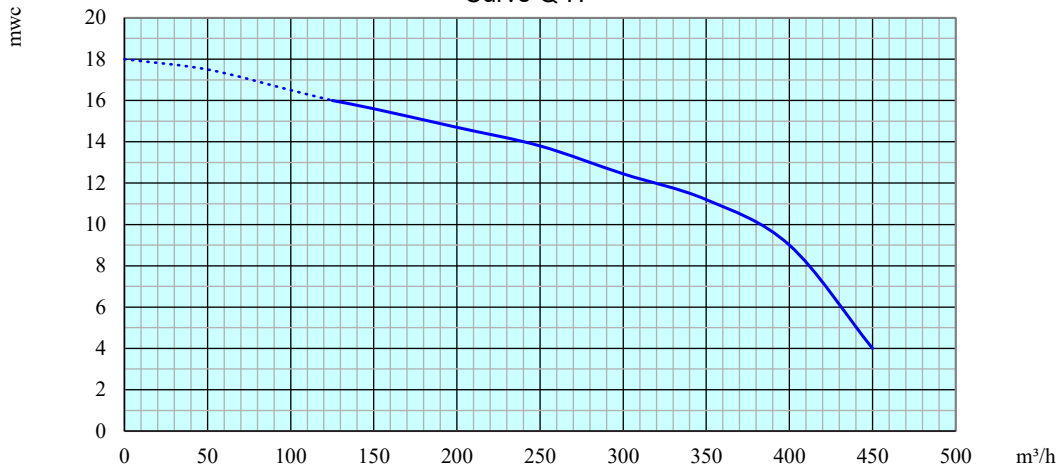

Type	: BA150 K254 TWGS
Applications	: sewage, contaminated water, ...
Motor	: 3 x 400V, 50 Hz
Power output	: 30 kW at 1.500 rpm
Nominal current	: 54,8 A
Free impeller passage	: 90 mm
Weight	: 1.360 kg
Dimensions	: 2.250 x 1.060 x 1.650 mm
Coupling	: suction and discharge side : Perrot quick couplings 6" male
Characteristics	: dry self priming centrifugal pump, equipped with vacuum pump MP50 compact pumpset, with non return valve at discharge side incl. vacuum- and manometer large free impeller passage control panel with thermal magnetic motor protection, star-delta starter, 2 float switches for automatic start/stop, plug 63A 5p male
Equipment	: chassis with forklift pockets, lifting eye