


CD-150MT SK

Diesel driven pump 6" on skid, sound attenuated



Curve Q-H

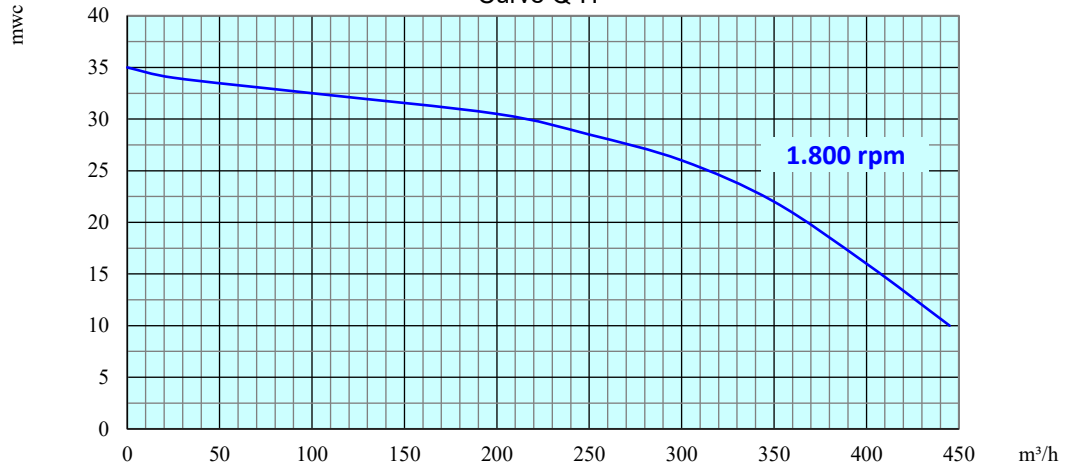

Type	: Godwin Pumps, Dri-Prime, CD-150MT
Applications	: sewage, sludge, slurry, ...
Engine	: Perkins watercooled diesel engine type 404D.22T
Power output	: 35,5 kW at 1.800 rpm
Free impeller passage	: Ø 65 mm
Starting system	: 12 V electrical start
Weight	: 1.340 kg (full tank)
Tankage	: 145 liters
Consumption	: 8 liters / hour at maximum capacity
Autonomy	: 18 h (at maximum capacity)
Dimensions	: 2.190 x 1.050 x 1.480 mm
Coupling	: suction and discharge : Perrot quick couplings 6" male
Characteristics	: on skid automatic dry self priming, indefinite dry-running possible, without damage
Equipment	: sound attenuated, fully banded canopy 65 dB at 7 m , spark-arrestor, master switch adjustable speed, float switches for automatic working central lifting eye, forklift pockets threeway valve for the connection of an external fuel tank