


CD-225ME Electrically driven pump 8"

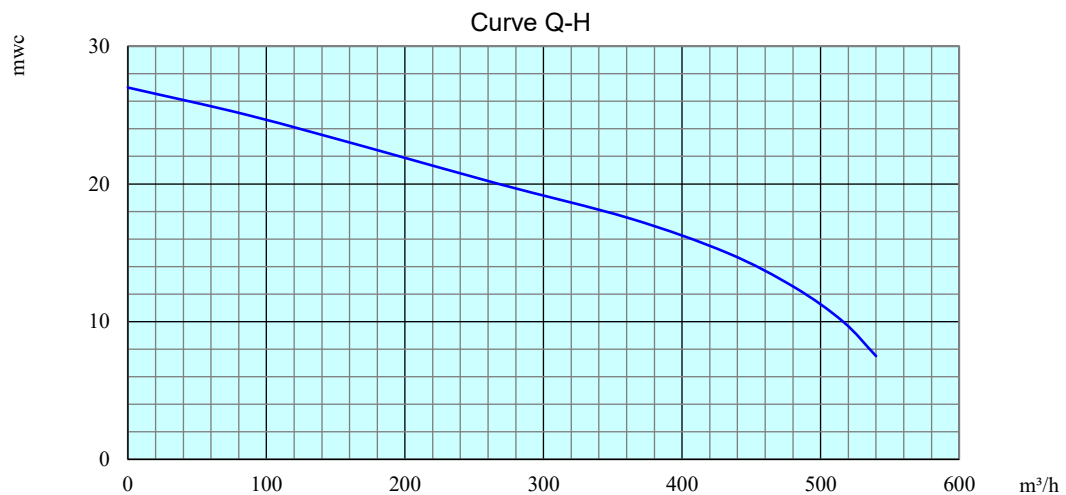

Type	: Godwin Pumps, Dri-Prime, CD-225ME
Applications	: sewage, sludge, muddy water, ...
Motor	: 3 x 400 V ; 50 Hz
Power output	: 30,0 kW at 1.500 rpm
Nominal current	: 55 A
Free impeller passage	: Ø 75 mm
Weight	: 1.060 kg
Dimensions	: 2.050 x 1.400 x 1.450 mm
Coupling	: suction and discharge side : Triflex quick couplings 8" male
Characteristics	: dry self priming centrifugal pump, equipped with Dri-Prime vacuum system compact pumpset, with non return valve at discharge side large free impeller passage Control panel with 2 float switches for automatic start/stop plug 63A 5P male
Equipment	: chassis, lifting eye