


CD-250M SK

Diesel driven pump 10" on skid, sound attenuated



Curve Q-H

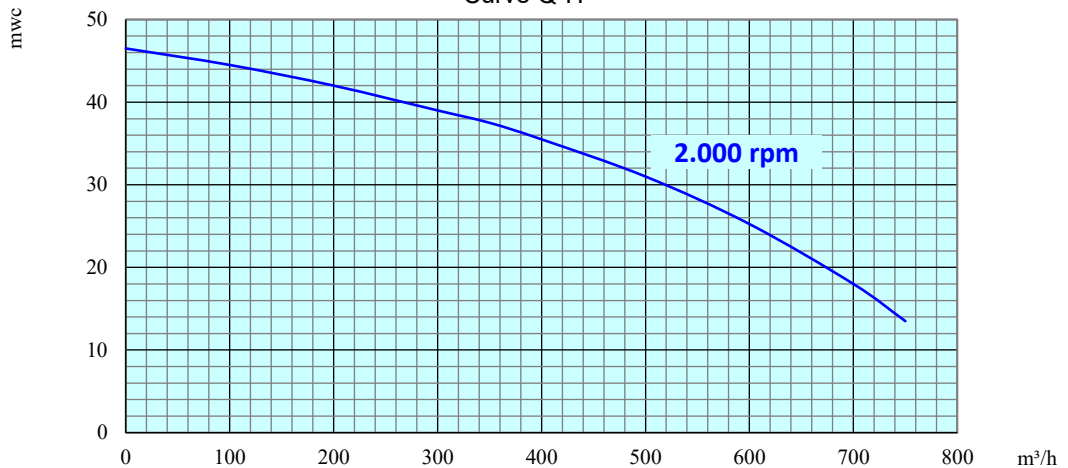

Type	: Godwin Pumps, Dri-Prime, CD-250M
Applications	: sewage, sludge, slurry, ...
Engine	: Perkins watercooled diesel engine type 1104D-E44TA
Power output	: 74 kW at 2.000 rpm
Free impeller passage	: Ø 75 mm
Starting system	: 12 V electrical start
Weight	: 2.700 kg (full tank)
Tankage	: 350 liters
Consumption	: 18,5 liters / hour at maximum capacity
Autonomy	: 18 h (at maximum capacity)
Dimensions	: 3.120 x 1.860 x 2.100 mm
Coupling	: suction and discharge : Triflex quick couplings 10" male
Characteristics	: on skid automatic dry self priming, indefinite dry-running possible, without damage
Equipment	: sound attenuated, fully banded canopy 78 dB at 7 m adjustable speed, float switches for automatic working central lifting eye, forklift pockets threeway valve for the connection of an external fuel tank