


## CH432-1,6/2D EX Explosion proof submersible pump 2"



Curve Q-H

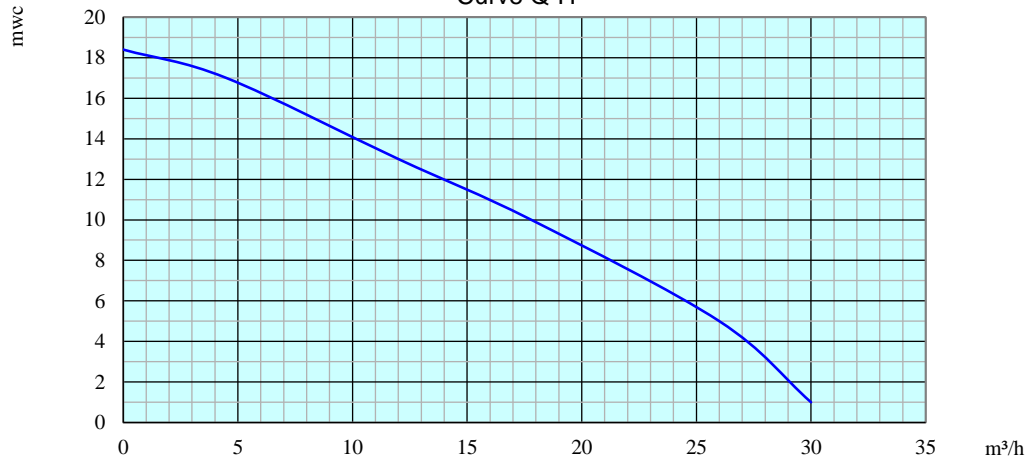

Type	: Homa, CH432-1,6/2D EX
Applications	: industrial waste water, contaminated water : for use in an explosive environment
Motor	: 3 x 400 V, 50 Hz, Ex II 2 G EX c d IIB T4
Power output	: 1,6 kW at 2.800 rpm
Nominal current	: 2,8 A
Free impeller passage	: Ø 10 mm
Weight	: 30 kg ( pump without cable and control box ) - 160 kg complete set
Dimensions	: set : L x W x H : 710 x 710 x 1.050 mm pump : Ø 280 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: <b>durable submersible pump, completely in stainless steel (316), seals in Viton</b>
Equipment	: 20 m supply cable between pump and control panel, 5 m cable between panel and plug control panel Ex II 2G Ex d [ia] IIB T6, equipped with 2 explosion proof floats l = 20 meter, Ex II 1G Ex ia IIC T6 A.T.X. plug 16A 5p Ex II 2 G Ex de IIC T6