


CH436-3,5/2D EX Explosion proof submersible pump 3"

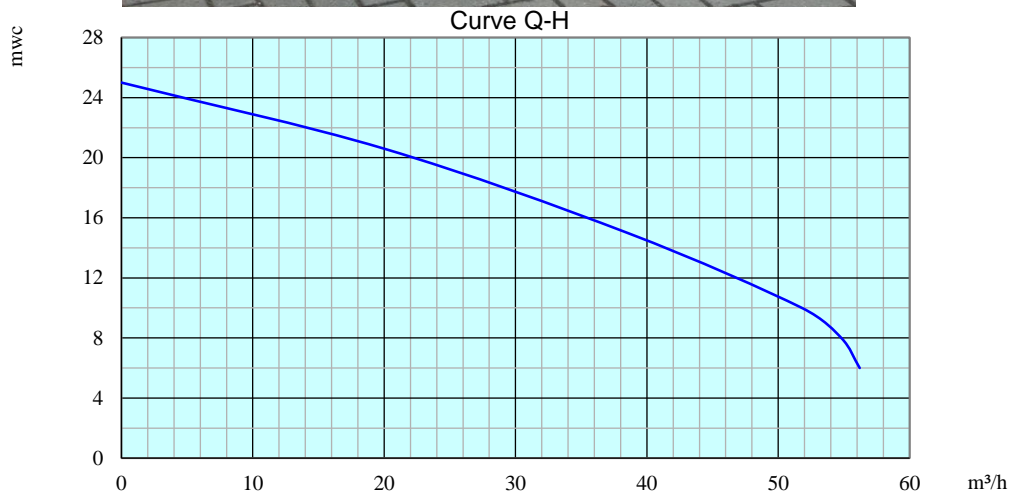

Type	: Homa, CH436-3,5/2D EX
Applications	: industrial waste water, contaminated water : for use in an explosive environment
Motor	: 3 x 400 V, 50 Hz, Ex II 2 G Ex c d IIB T4
Power output	: 3,5 kW at 2.800 rpm
Nominal current	: 7,1 A
Free impeller passage	: Ø 10 mm
Weight	: 52 kg (pump without cable and control box) - 160 kg complete set
Dimensions	: set : L x W x H : 710 x 710 x 1.050 mm pump : Ø 400 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: durable submersible pump, completely in stainless steel 316, seals in Viton
Equipment	: 20 m supply cable between pump and control panel, 5 m cable between panel and plug control panel EX II 2G Ex d [ia] IIB T6, equipped with 2 explosion proof floats l = 20 meter, Ex II 1G Ex ia IIC T6 A.T.X. plug 16A 5p Ex II 2G Eex de IIC T6