


E05K-S01 Submersible sewage pump 6"

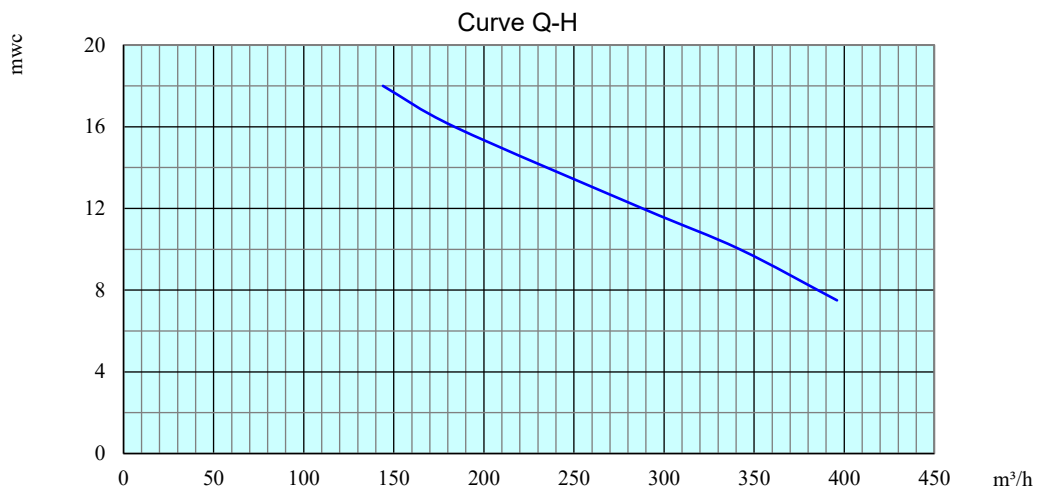

Type	: Hidrostal, E05K-S01
Applications	: strongly contaminated fluids, waste water, sewage, mud water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 19,5 kW at 1.460 rpm
Nominal current	: 41 A
Run-up	: direct (D.O.L)
Free impeller passage	: 100 mm ø
Weight	: 408 kg (without cable and control box)
Height	: 1.540 mm
Diameter	: width : 900 mm x length : 600 mm
Coupling	: Perrot quick coupling 6" male
Characteristics	: large free impeller passage centrifugal screw type impeller klixon and water detector in oil chamber oil filled cooling jacket
Equipment	: 20 m power cable control panel, suitable for outdoor use, incl. 2 float switches, L=20m plug 63A 5p