


GSL30 Submersible sewage pump 3"



Curve Q-H

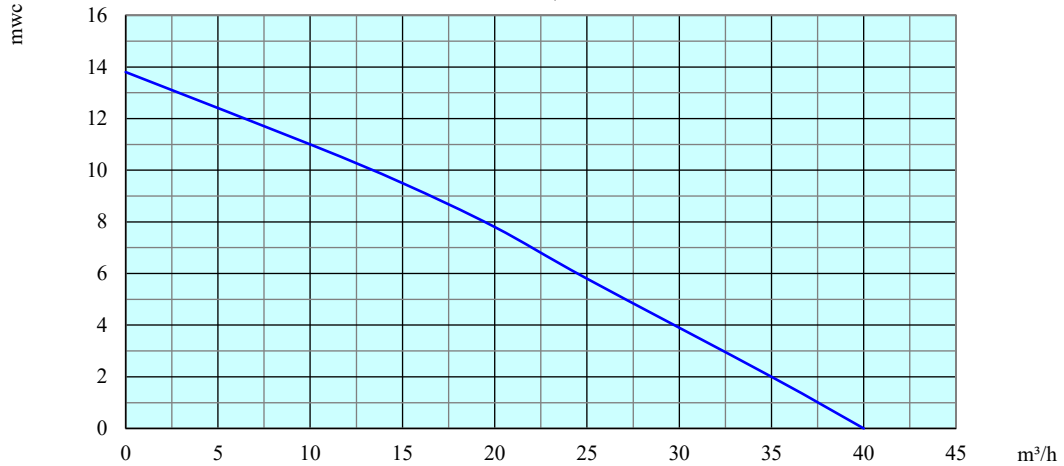

Type	: Godwin, GSL30
Applications	: waste water, sewage, mud, ...
Motor	: 1 x 230 V, 50 Hz
Power output	: 1,9 kW at 2.800 rpm
Nominal current	: 8,5 A
Free impeller passage	: 50 mm
Weight	: 27 kg (without cable)
Height	: 702 mm
Diameter	: Ø 370 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: large free impeller passage lightweight vortex impeller
Equipment	: 20 m power cable start – stop switch with thermo-magnetic motor protection electrical plug