


GSL35 Submersible sewage pump 3"



Curve Q-H

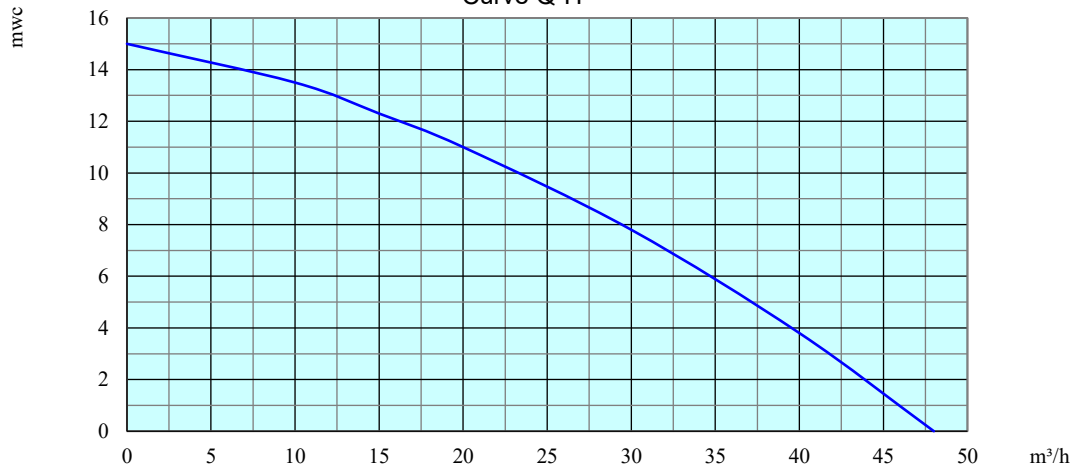

Type	: Godwin, GSL35
Applications	: waste water, sewage, muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 2,8 kW at 2.800 rpm
Nominal current	: 4,7 A
Free impeller passage	: 50 mm
Weight	: 27 kg (without cable)
Height	: 702 mm
Diameter	: Ø 370 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: large free impeller passage lightweight vortex impeller
Equipment	: 20 m power cable start - stop switch with thermo-magnetic motor protection plug 16A5P with phase inverter