


## HS2.4S

### Submersible contractor pump 2"

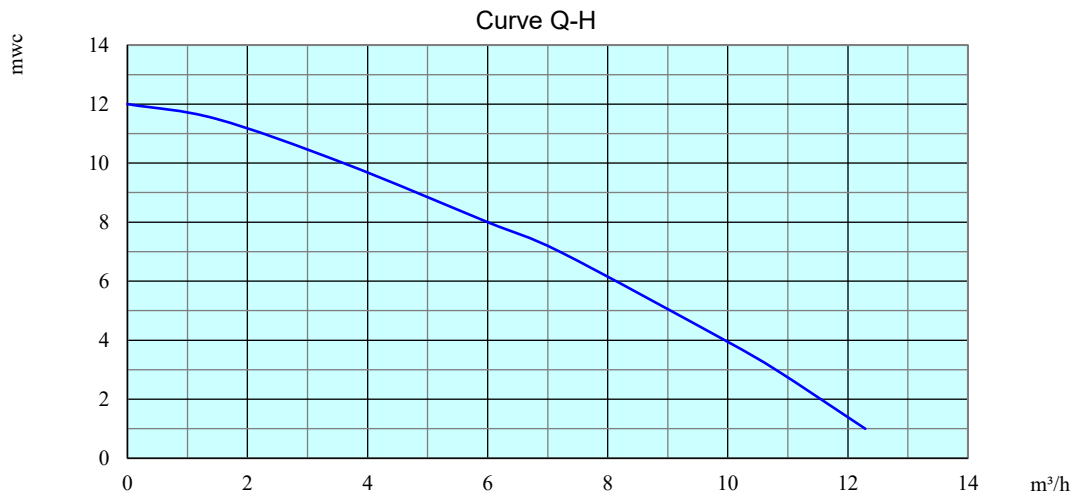

Type	: Tsurumi, HS2.4S
Applications	: sandy water, ...
Motor	: 1 x 230 V, 50 Hz
Power output	: 0,58 kW at 2.850 rpm
Nominal current	: 2,6 A
Free impeller passage	: 7 mm
Weight	: 11,3 kg ( without cable )
Height	: 328 mm
Diameter	: Ø 241 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: small submersible contractor pump with agitator heavy duty yet lightweight very durable, hardwearing pump
Equipment	: 10 m power cable electric plug