


HSD2.55S

Submersible contractor pump 2"



Curve Q-H

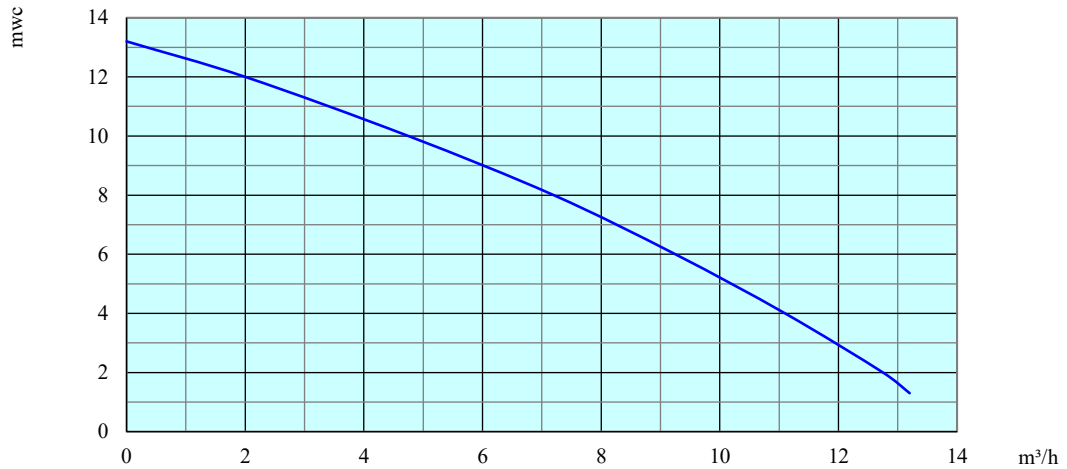

Type	: Tsurumi, HSD2.55S
Applications	: sandy water, sludge, ...
Motor	: 1 x 230 V, 50 Hz
Power output	: 0,82 kW at 2.820 rpm
Nominal current	: 3,6 A
Free impeller passage	: 10 mm
Weight	: 15,0 kg (without cable)
Height	: 391 mm
Diameter	: Ø 234 mm
Coupling	: discharge side : Perrot quick coupling 2" male
Characteristics	: small submersible contractor pump with agitator lightweight very durable, hardwearing pump
Equipment	: 10 m power cable electrical plug