


KRS2-69 Submersible drainage pump 6"



Curve Q-H

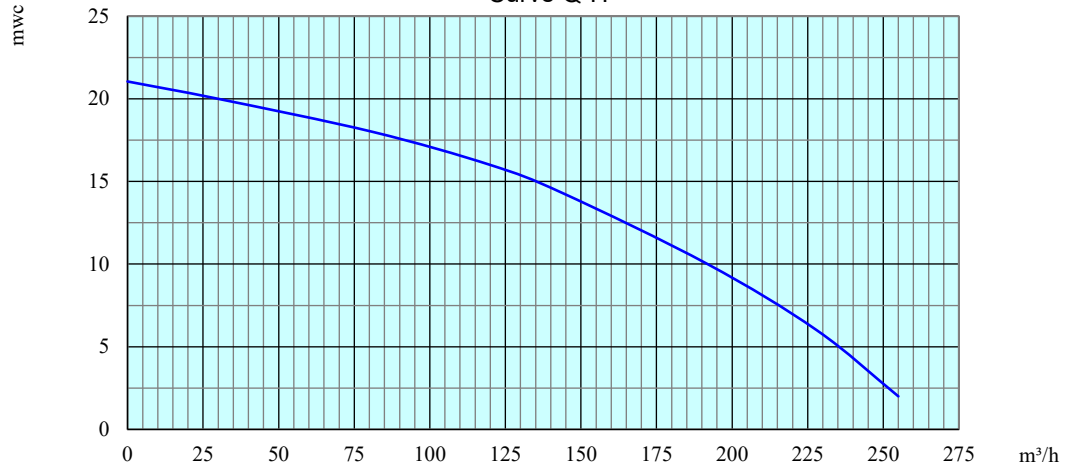

Type	: Tsurumi, KRS2-69
Applications	: muddy, sandy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 11,1 kW at 1.450 rpm
Nominal current	: 19 A
Free impeller passage	: 20 mm
Weight	: 155 kg (without cable)
Height	: 812 mm
Diameter	: Ø 487 mm
Coupling	: discharge side : Perrot quick coupling 6" male
Characteristics	: durable, hardwearing contractor pump robust high-efficiency dewatering pump impeller in ductile iron casting
Equipment	: 20 m power cable start – stop switch with thermo-magnetic motor protection plug 32A 5p