


KTZ-23.7 (KTZ-37H) Submersible drainage pump 3"



Curve Q-H

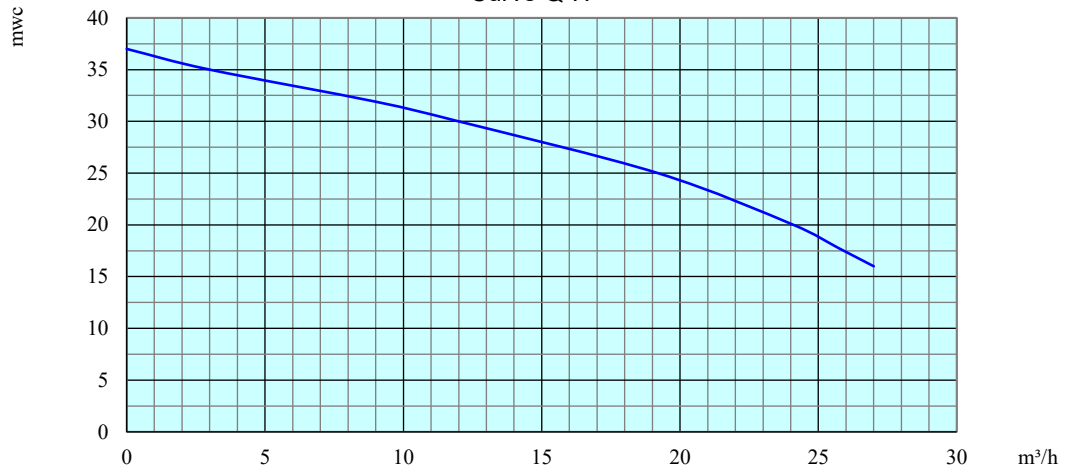

Type	: Tsurumi, KTZ-23.7
Applications	: sandy, muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 4,6 kW at 2.850 rpm
Nominal current	: 7,5 A
Free impeller passage	: 8,5 mm
Weight	: 56 kg (without cable)
Height	: 627 mm
Diameter	: Ø 283 mm
Coupling	: discharge side : Perrot quick coupling 3" male
Characteristics	: very durable, hardwearing pump compact contractor pump open impeller in chromium iron
Equipment	: 20 m power cable start - stop switch with thermo-magnetic motor protection plug 16A 5p