


KTZ-67.5 (KTZ-75H) Submersible drainage pump 6"



Curve Q-H

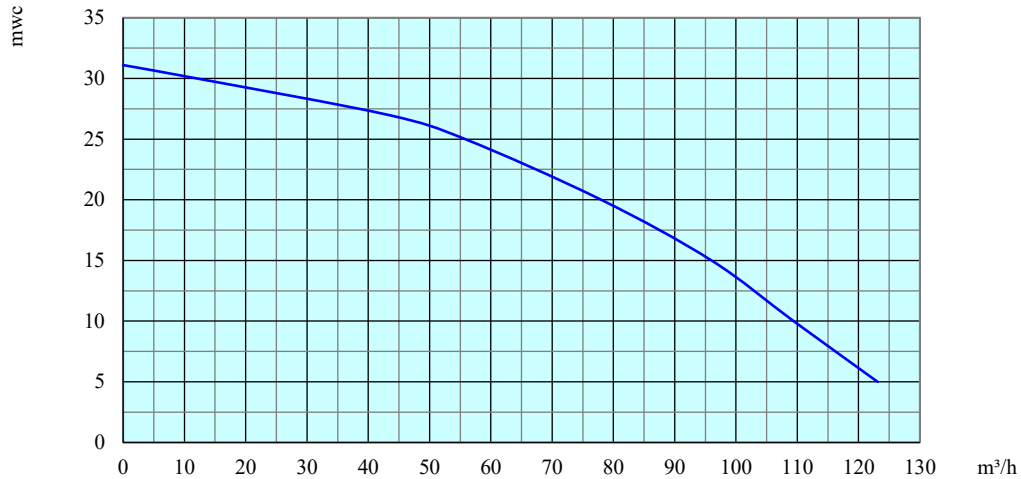

Type	: Tsurumi, KTZ-67.5
Applications	: sandy, muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 9,2 kW at 2.850 rpm
Nominal current	: 14,3 A
Free impeller passage	: 20 mm
Weight	: 98 kg (without cable)
Height	: 799 mm
Diameter	: Ø 330 mm
Coupling	: discharge side : Perrot quick coupling 6" male
Characteristics	: very durable, hardwearing pump slim shape, compact contractor pump open impeller in chromium iron
Equipment	: 20 m power cable start - stop switch with thermo-magnetic motor protection plug 32A 5p