


LH-637 Submersible pump 6", high pressure

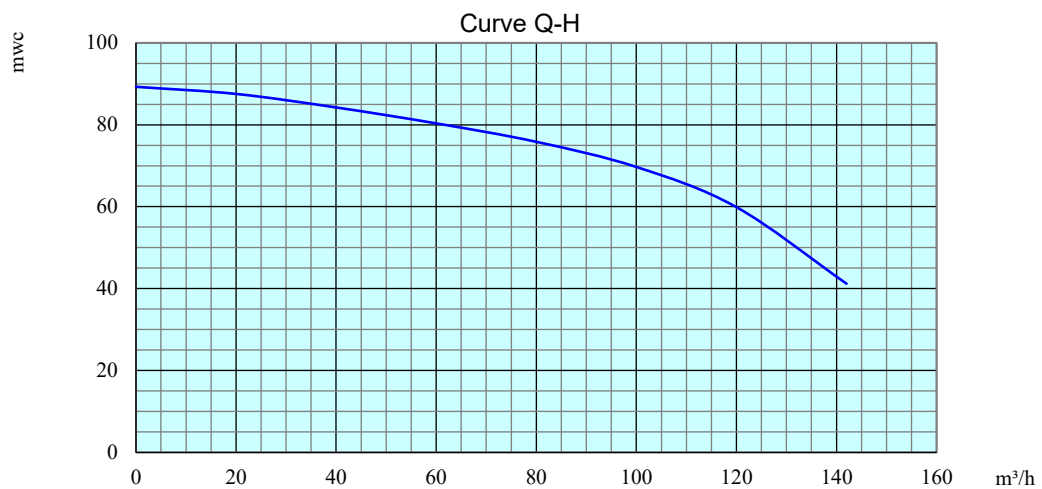

Type	: Tsurumi, LH-637
Applications	: clear water, slightly muddy water, ...
Motor	: 3 x 400 V, 50 Hz
Power output	: 42 kW at 2.940 rpm
Nominal current	: 67 A
Free impeller passage	: 6 mm
Weight	: 495 kg (without cable, without electrical control panel)
Height	: 1800 mm
Diameter	: Ø 530 mm
Coupling	: discharge side : DIN flange 6" PN10/16
Characteristics	: durable, hardwearing submersible pump compact, slim-line contractor pump
Equipment	: 20 m power cable control panel suitable for outdoor use, 2 float switches l=20m plug 125A 5p