


LIB 1-3 GX160

Membrane pump with gasoline engine 3"

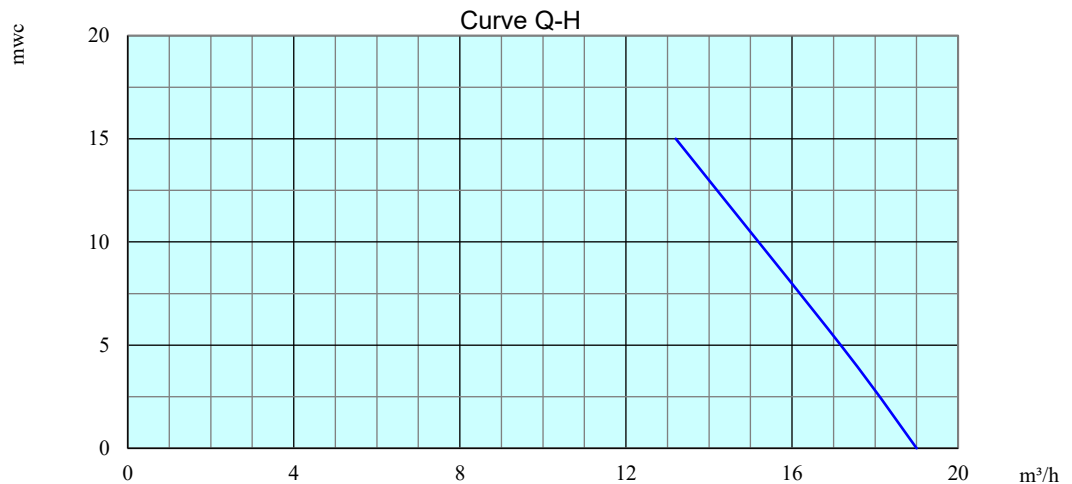

Type	: Libellula 1-3"
Applications	: irrigation, water with sand, ... (contaminated water)
Engine	: Honda gasoline engine, aircooled, type GX 160
Power output	: 2,5 kW at 2.900 rpm
Pump pulses	: 65/min at 2.800 rpm
Free impeller passage	: 50 mm
Starting system	: recoil start
Weight	: 64 kg (wraparound frame)
Tankage	: 3,1 liter
Consumption	: 1,4 liter/hour at maximum capacity
Dimensions	: 950 x 700 x 780 mm
Coupling	: suction and discharge side : Perrot quick couplings 3" male
Characteristics	: dry self priming portable and mobile set
Equipment	: metal protection frame tires