


## NKZ3-100H Submersible dredge pump 4"



Curve Q-H

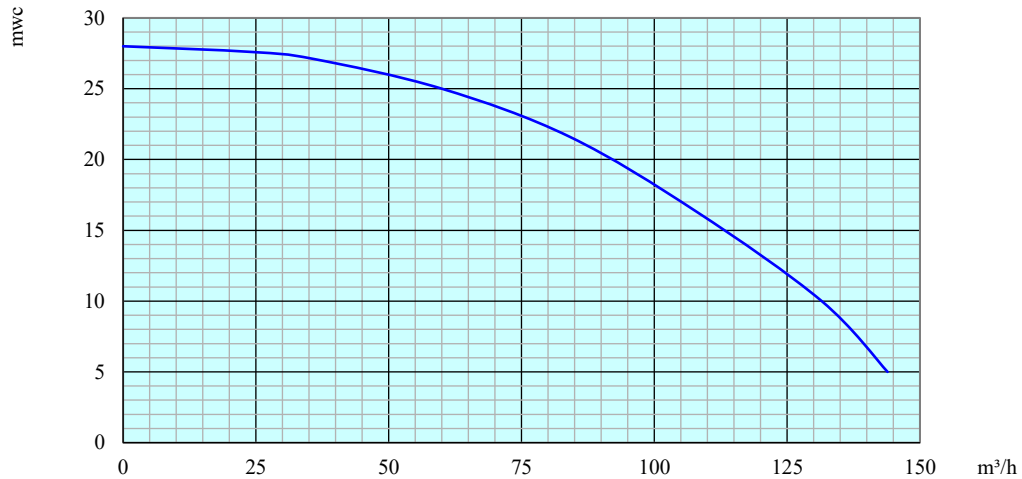

Type	: Tsurumi, NKZ3-100H
Applications	: dredging, ... ( liquids containing mud, slurry, bentonite )
Motor	: 3 x 400 V, 50 Hz
Power output	: 13,4 kW at 1.450 rpm
Nominal current	: 21,8 A
Free impeller passage	: 20 mm
Weight	: 192 kg ( without cable )
Height	: 841 mm
Diameter	: Ø 547 mm
Coupling	: discharge side : Perrot quick coupling 4" male
Characteristics	: <b>agitator, to put solids in suspension ready for pumping</b> durable, hardwearing submersible pump open impeller in chromium iron
Equipment	: 20 m power cable start- stop switch with thermo-magnetic motor protection plug 32A 5p