


NKZ3-80H Submersible dredge pump 3"



Curve Q-H

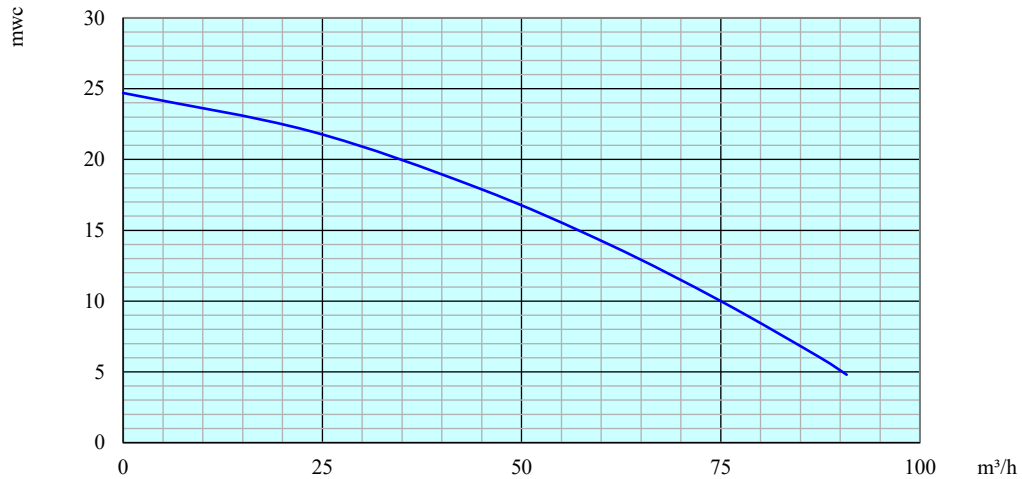

| | |
|-----------------------|--|
| Type | : Tsurumi, NKZ3-80H |
| Applications | : dredging, ... (liquids containing mud, slurry, bentonite) |
| Motor | : 3 x 400 V, 50 Hz |
| Power output | : 6,9 kW at 1.435 rpm |
| Nominal current | : 12,1 A |
| Free impeller passage | : 20 mm |
| Weight | : 132 kg (without cable) |
| Height | : 754 mm |
| Diameter | : Ø 491 mm |
| Coupling | : discharge side : Perrot quick coupling 3" male |
| Characteristics | : agitator, to put solids in suspension ready for pumping durable, hardwearing submersible pump open impeller in chromium iron |
| Equipment | : 20 m power cable start- stop switch with thermo-magnetic motor protection plug 16A 5p |