


## O3RA-T Electrically driven pump 3"



Curve Q-H

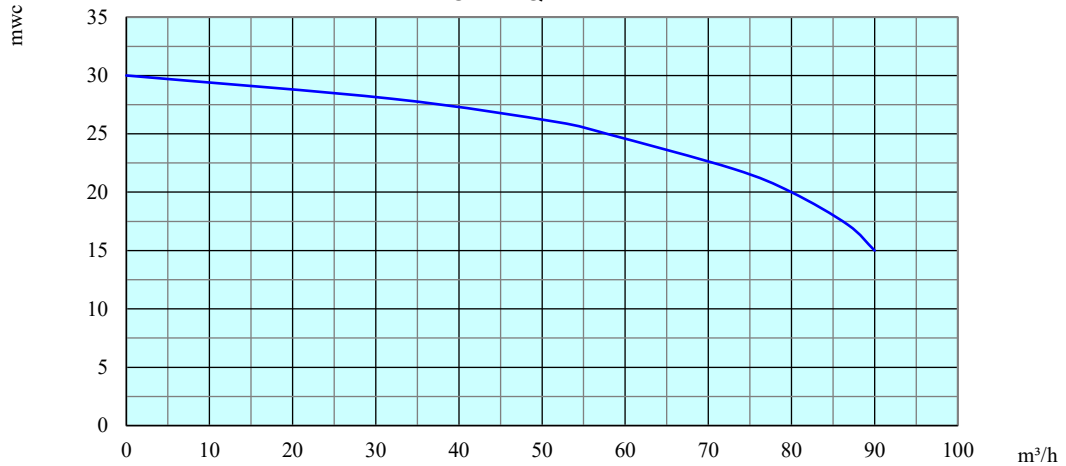

Type	: Alpha O3RA-T
Applications	: muddy water ...
Motor	: 3 x 400V, 50 Hz
Power output	: 7,5 kW at 2.900 rpm
Nominal current	: 13 A
Free impeller passage	: 24 mm
Weight	: 179 kg
Dimensions	: 1.030 x 440 x 960 mm
Coupling	: suction and discharge side : Perrot quick couplings 3" male
Characteristics	: self priming after a first filling of the pump casing compact pump set large free impeller passage <b>Viton seals</b>
Equipment	: chassis frame lifting eye plug 16A 5P male