


PP43 – 572VE Diesel driven pump 6", high pressure

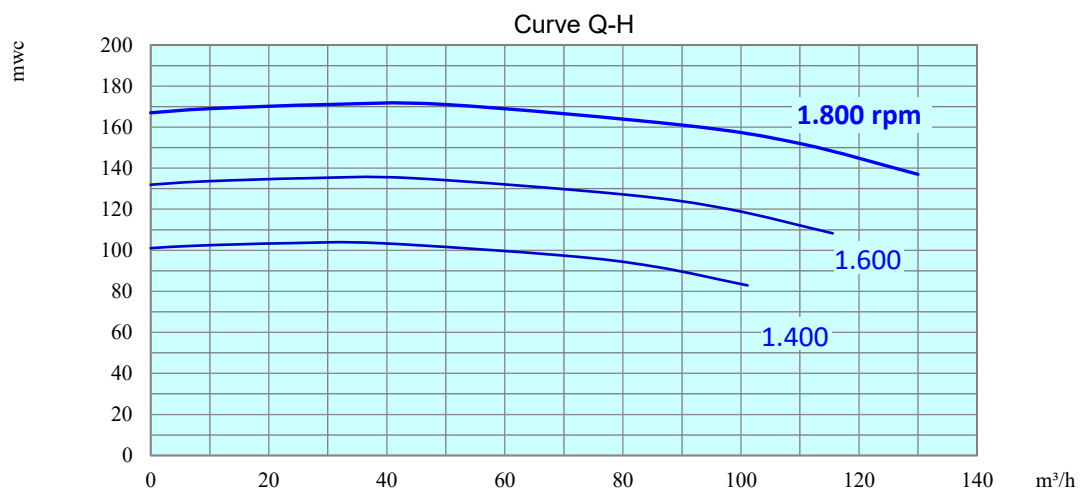

Type	: PP43C21 with Volvo TAD572VE
Applications	: (clear and slightly polluted water) fluidization, fire fighting-like applications, quarries
Engine	: Volvo Penta TAD572VE 4 cilinder diesel engine with Adblue, watercooled, sound attenuated
Power output	: 145 kW at 1.800 rpm
Free impeller passage	: 20 mm
Starting system	: 24 V electrical start
Weight	: 5.700 kg
Tankage	: 300 liter Adblue/ External fueltank required
Consumption	: 35,5 liters / hour at maximum capacity
Autonomy	: 55 h at maximum capacity with tank of 2.000 liter
Dimensions	: 4.500 x 1.700 x 2.259 mm
Coupling	: suction : Perrot quick coupling 6" male discharge : DIN-flange DN100 PN16
Characteristics	: on skid, sound attenuated, fully bunded canopy, automatic dry self priming, dry-running possible
Equipment	: LOFA control panel with speed regulation, automatic level adjustment by 2 floats or probe 4-20 mA threeway valve for the connection of an external fuel tank, central lifting eye, forklift pockets minimum flow security, exterior emergency switch, spark-arrestor, Chalwyn valve, master switch