


QHH - 80 SK

Diesel driven pump 4", high pressure



Curve Q-H

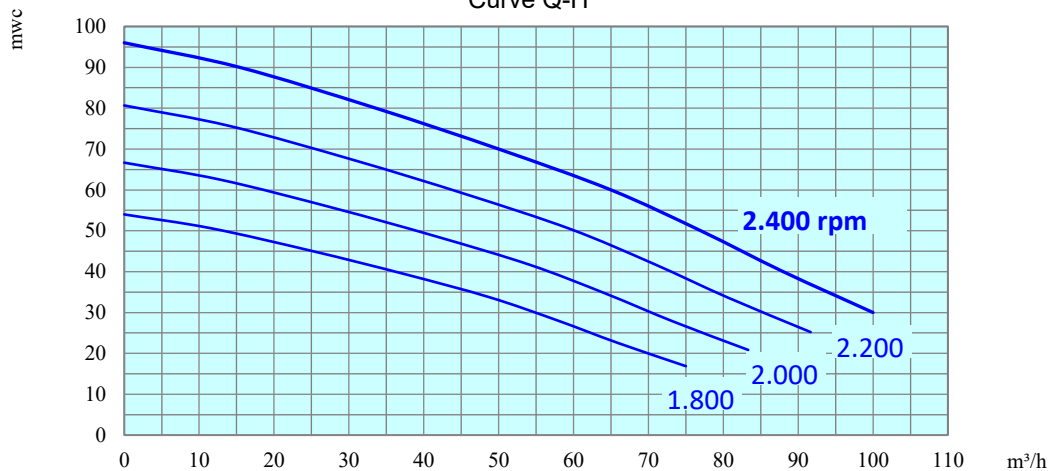

Type	: QHH-80SK
Applications	: fluidization, fire fighting-like applications, clear to slightly polluted water,
Engine	: Isuzu 4LE-2 four cilinder diesel engine, watercooled, sound attenuated
Power output	: 29,7 kW at 2.400 rpm
Free impeller passage	: 20 mm
Starting system	: 12 V electrical start
Weight	: 1.320 kg (full tank)
Tankage	: 220 liters
Consumption	: 8,9 liters / hour at maximum capacity
Autonomy	: 25 h at maximum capacity
Dimensions	: 2.400 x 1.150 x 1.790 mm
Coupling	: suction: Perrot quick coupling 4" male discharge : DIN-flange DN80 PN16
Characteristics	: on skid, sound attenuated, fully bunded canopy 69 dB at 7 m automatic dry self priming, indefinite dry-running possible, without damage
Equipment	: adjustable speed, Chalwyn valve and spark-arrestor central lifting eye, forklift pockets threeway valve for the connection of an external fuel tank