


QI200 SK

Diesel driven pump 8" on skid, sound attenuated



Curve Q-H

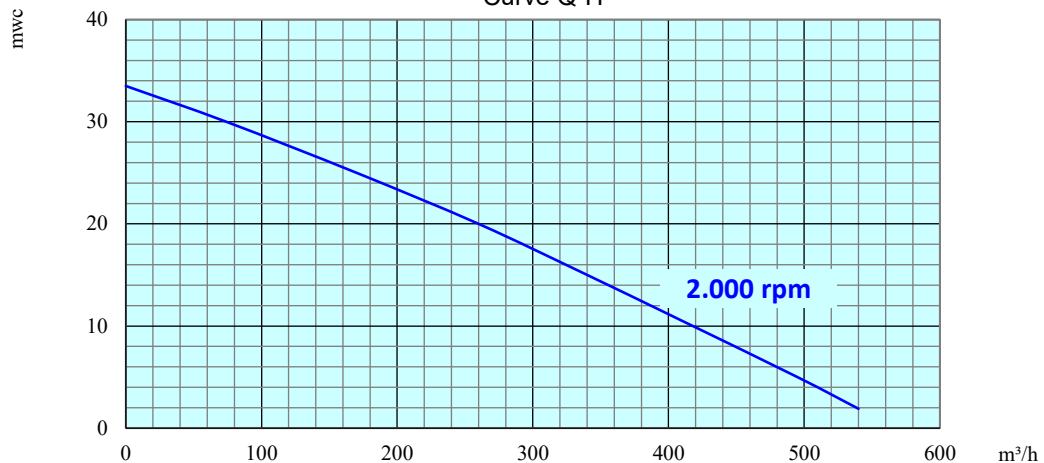

Type	: SPP Pumps, QI200
Applications	: sewage, sludge, slurry, ...
Engine	: Isuzu watercooled diesel engine type 4LE1
Power output	: 25,6 kW at 2.000 rpm
Free impeller passage	: Ø 75 x 90 mm
Starting system	: 12 V electrical start
Weight	: 1.380 kg (full tank)
Tankage	: 220 liters
Consumption	: 7,8 liters / hour at maximum capacity
Autonomy	: 28 h (at maximum capacity)
Dimensions	: 2.710 x 1.150 x 1.790 mm
Coupling	: suction and discharge : Triflex quick couplings 8" male
Characteristics	: on skid automatic dry self priming, indefinite dry-running possible, without damage
Equipment	: sound attenuated, fully banded canopy 65 dB at 7 m adjustable speed, spark-arrestor central lifting eye, forklift pockets threeway valve for the connection of an external fuel tank