


SC44VM Electrically driven pump 4"

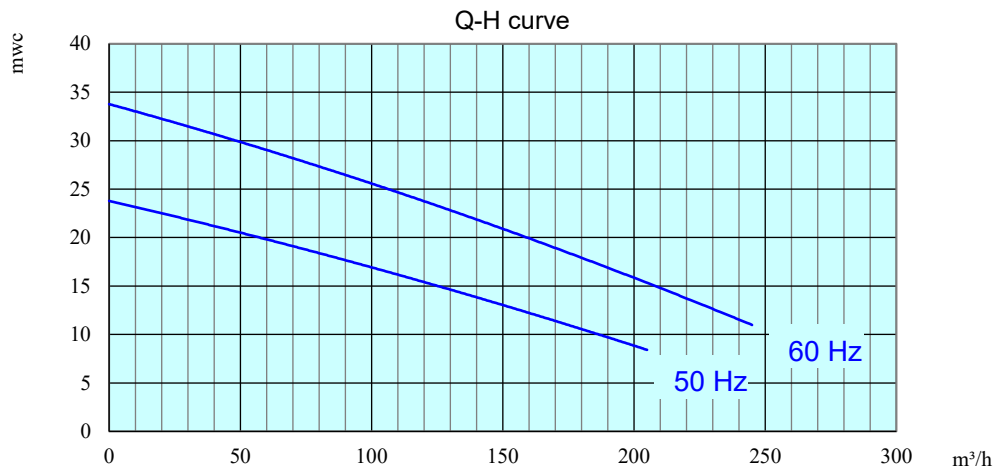

Type	: Pioneer SC44VM
Applications	: sewage, contaminated water, bentonite, ...
Motor	: 3 x 400V, 60 Hz
Power output	: 30 kW $I_{nom}=56,2A$
Pump	: max. 18 kW by 50Hz (clear water)
Power absorbed	: max. 26 kW by 60Hz (clear water)
Free impeller passage	: 85 mm, vortex impeller
Weight	: 1.260 kg
Dimensions	: L 2.220 x W 1.060 x H 1.600 mm
Coupling	: suction side : Perrot quick coupling 6" male : discharge side : Perrot quick couplings 4" male
Charasteristics	: dry self priming centrifugal pump, switchable vacuum pumping system Standard no control! 3 cables 20m with free cable end (connection: main pump 4x16mm ² , PTC resistor 3x2,5mm ² and vacuum pump MP50 4x2,5mm ²) control possible through optional mobile frequency controller
Equipment	: stackable subframe, with forklift pockets and lifting eye