


SKK 2448-P74 EX Explosion proof submersible pump 4"



Curve Q-H

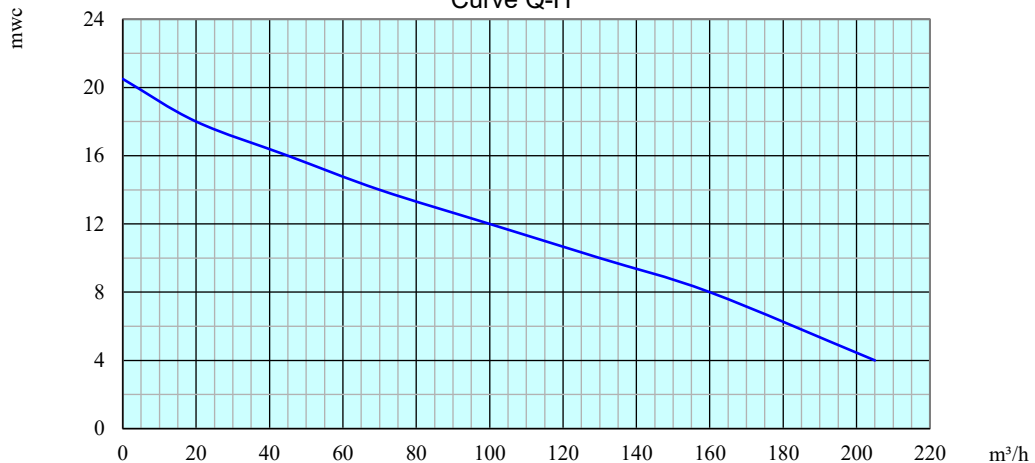

Type	: Homa, SKK 2448-P74 EX
Applications	: industrial waste water, contaminated water : for use in an explosive environment
Motor	: 3 x 400 V, 50 Hz, Ex II 2 G Ex c d II BT4
Power output	: 9,5 kW at 1.450 rpm
Nominal current	: 15,6 A
Free impeller passage	: Ø 100 mm
Weight	: 126 kg (pump without cable and control box)
Height	: 1.291 mm
Diameter pump	: Ø 597 mm
Dimensions control panel	: 525 x 470 x 1.080 mm
Coupling	: discharge side : Perrot quick coupling 4" male
Characteristics	: closed single -channel impeller in cast iron, with brass wearing seals in Viton
Equipment	: 20 m supply cable between pump and control panel, 5 m cable between panel and plug control panel EX II 2 G EEx d IIB T4 equipped with 2 explosion proof floats l = 20 meter, Ex II 1 G Ex ia IIC T6 A.T.X. plug 32A 5p Ex II 2 G Ex de IIC T6