


ZLND 050315 Electrically driven pump 4"

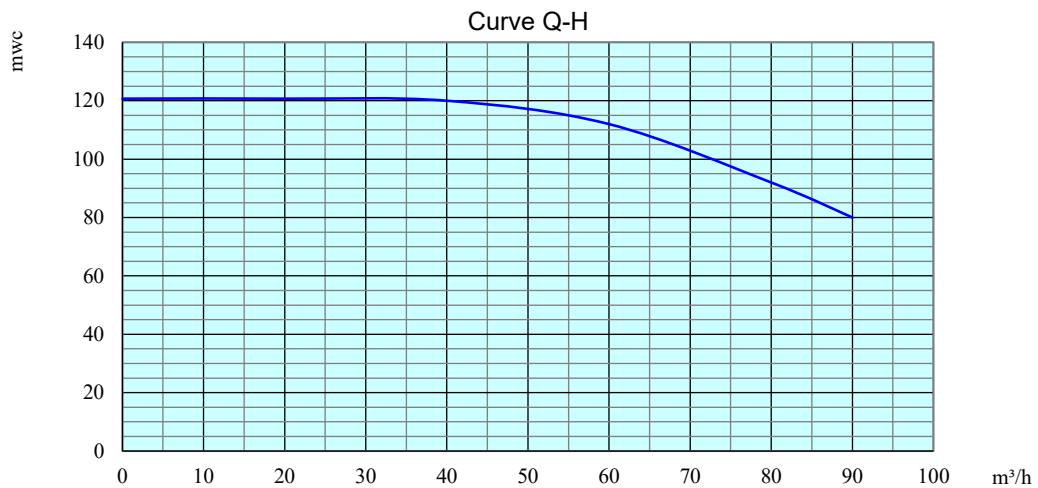

Type	: Sterling Sihi ZLND 050315
Applications	: clear water
Motor	: 3 x 400V, 50 Hz
Power output	: 45 kW at 2.960 rpm
Nominal current	: 77,6 A
Free impeller passage	: 3 mm
Weight	: 1.205 kg
Dimensions	: 2.220 x 1.060 x 1.600 mm
Coupling	: suction side : DIN flange DN100 PN16 : discharge side : DIN flange DN080 PN16
Characteristics	: minimum required back pressure 8 Bar : priming centrifugal pump (non self-priming) : non return valve and gate valve at discharge side : control panel with thermo-magnetic motor protection, Δ - Δ start, : 2 float switches for automatic start/stop, plug 125A 5p male : optional: operating with vacuum system is possible through separately switchable vacuum pump
Equipment	: stackable chassis with forklift pockets, lifting eye